


# POWER SPRAYERS




Our powerful, reliable and durable power sprayers are the preferred tool for applying release agents, water-based sealants and curing compounds on concrete construction sites. The continuous recirculating system ensures your material is always well mixed and ready to spray. Available in barrel, cart or tow models.

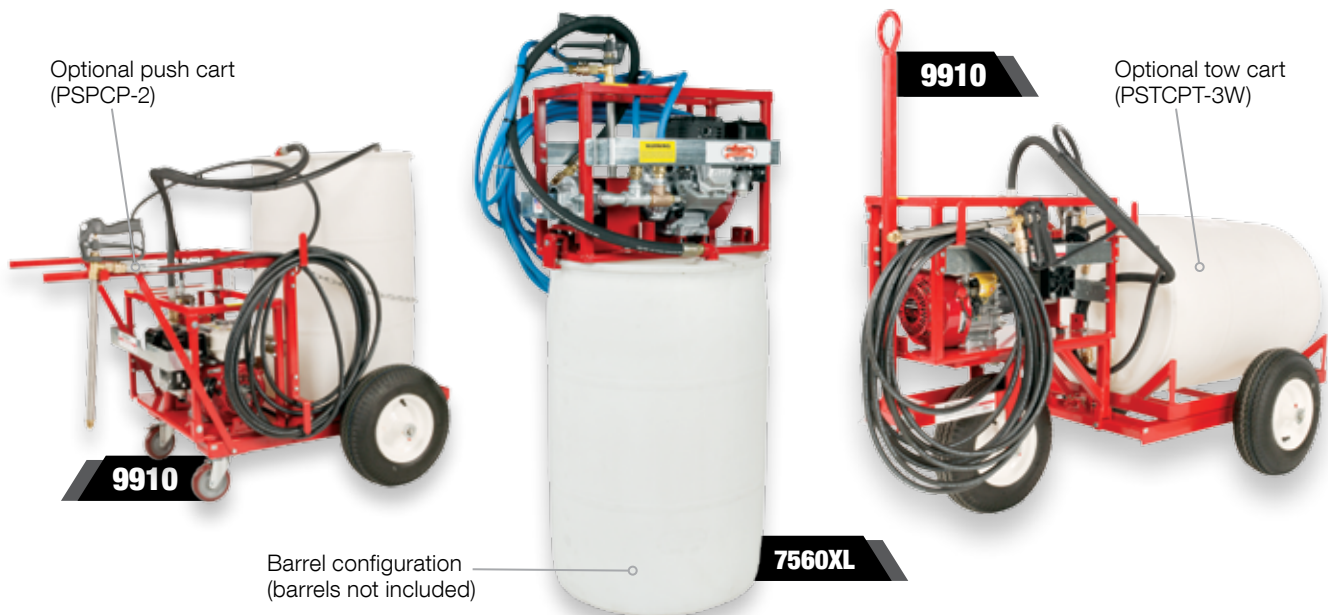

POWERED by  
**HONDA**

DESCRIPTION	9910	7560XL
ENGINE	Honda GX160 (163 cc)	Honda GX120 (118 cc)
HORSEPOWER CLASS	5.5 hp (4.1 kW)	4 hp (3 kW)
MAXIMUM FLOW RATE	9.5 gpm	7.5 gpm
PUMP TYPE	Diaphragm	Roller Ball
HOSE TYPE	Hydraulic	3/8" Lock-On
HOSE LENGTH	50 ft (15.24 m)	50 ft (15.24 m)
SPRAYER TIP	Fan Tip 4020	Fan Tip 4020
MAXIMUM SOLID CONTENT	35%	30%
WEIGHT	134 lb (61 kg)	106 lb (48 kg)

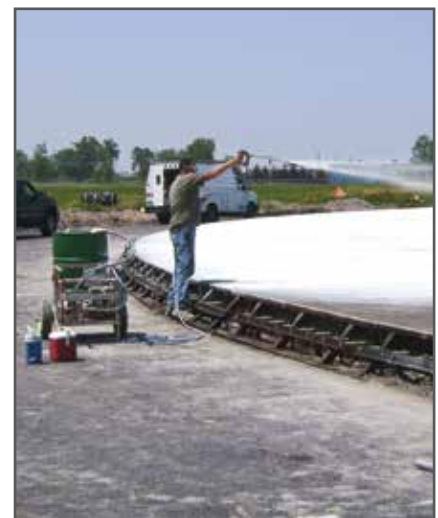

**CONTRACTOR TOUGH**  
SITE PREP • PLACING • FINISHING • PAVING EQUIPMENT

# CONCRETE SAW



A compact saw with powerful attributes, our concrete saw features a high-horsepower engine, deep cutting abilities and is highly maneuverable.

DESCRIPTION	APS20H
ENGINE	Honda GX390 (389 cc)
HORSEPOWER CLASS	13 hp (9.7 kW)
MAXIMUM CUTTING DEPTH	7 in (17.5 cm)
BLADE SIZE	12 - 20 in (35 - 50 cm)
WEIGHT	348 lb (158 kg)
DIMENSIONS	62 x 22 x 43 in (155.7 x 55.8 x 108 cm)



PARAGOULD, AR 72450 USA // [WWW.ALLENENG.COM](http://WWW.ALLENENG.COM)  
800.643.0095 (USA ONLY) // 870.236.7751

**allen**  
**ENGINEERING**  
CORPORATION