

TAMPING COMPACTORS

TAMPING RAMMER COMPACTORS




With high stroke and maximum blows per minute, our high-performance tamping compactors produce impressive impact force and are perfect for cohesive soil compaction application.

CONTRACTOR TOUGH

SITE PREP • PLACING • FINISHING • PAVING EQUIPMENT

PRODUCT DETAILS

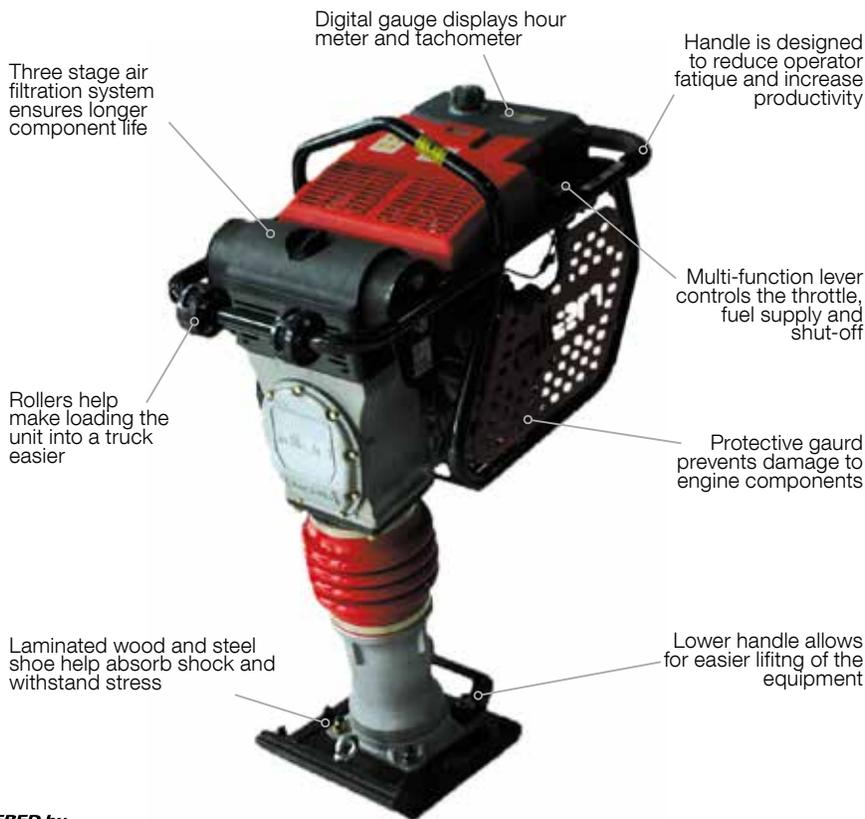

Reliable Honda GX100 gasoline engines provide excellent power.



Steel protective gaurds prevent damage to key engine components.



The multi-functional level controls the throttle, fuel supply and shut off.



Three stage air filtration system ensures longer component life by filtering out the majority of environmental particles.

POWERED by
HONDA

DESCRIPTION	ATC130H	ATC170H
ENGINE	Honda GX100 (98 cc)	Honda GX100 (98 cc)
HORSEPOWER CLASS	3 hp (2.2 kW)	3 hp (2.2 kW)
FUEL CAPACITY	.9 gal (3.5 L)	.9 gal (3.5 L)
BLOWS PER MINUTE	650 - 700 bpm	650 - 700 bpm
SHOE SIZE	13.4 x 10.8 in (34 x 27.5 cm)	13.1 x 11.2 in (33.5 x 28.5 cm)
IMPACT FORCE	3,064 lbf (1,390 kgf)	3,527 lbf (1,600 kgf)
TRAVEL SPEED	32.8 - 42.7 ft/min (10 - 13 m/min)	32.8 - 42.7 ft/min (10 - 13 m/min)
COMPACTION DEPTH	24 in (61 cm)	24 in (61 cm)
COMPACTION AREA	2,799 ft ² /hr (260 m ² /hr)	2,799 ft ² /hr (260 m ² /hr)
WEIGHT	152 lb (69 kg)	175 lb (79 kg)
DIMENSIONS (L X W X H)	28.9 x 14.5 x 40.7 in (73.5 x 37 x 103.5 cm)	28.9 x 14.5 x 42.1 in (73.5 x 37 x 107 cm)